

Revolutionary SIP phone with a 7-inch touch-panel function

The SIP-T48G is Yealink's most recent innovative IP Phone for a fast-changing world. Designed specifically for both local and international use by business, industry and commerce, it incorporates a large touch panel that makes switching between different screens and applications swift, easy and convenient. Yealink's Optima HD technology very carefully creates the impression that you are sitting virtually face-to-face opposite the person at the other end of the call. The T48G is also built for the Gigabit Ethernet and facilitates very rapid call handling and the application of accessories such as a Bluetooth USB Dongle and a Wi-Fi USB Dongle. The new IP Phone supports impressive productivity-enhancing features too which make it the natural and obvious efficiency tool for today's busy executives and professionals.



Optima
HD Voice



7 inch
Touch Screen



Gigabit



Paperless



USB 2.0

Key Features and Benefits

Revolutionarily new design

Yealink's SIP Phones continue to evolve, the SIP-T4 Series have been designed by pursuing ease of use in even the tiniest details, these new design include 7 inch touch screen, scratch-resistant surface, metallic texture, non-slip rubber feet, ergonomic recessed buttons, etc.

HD Audio

Yealink Optima HD Voice refers to the combination of software and hardware design as well as the implementation of wideband technology to maximizes the acoustic performance. Coupled with advanced acoustic clarity technology such as full duplex, echo cancellation, adaptive jitter buffer etc. Creating an amazing face-to-face live experience.

A rich visual experience for applications

SIP-T48G Supports vast productivity-enhancing feature such as XML Browser, call forward, call transfer, 3-way conferencing and a superior UC experience. the 7" 800 x 480-pixel color touch screen with backlight enables rich visual presentation and easier navigation of the menu.

Advanced connectivity

For network connectivity, the SIP-T48G comes with two Gigabit Ethernet ports, one of them suitable for Power over Ethernet. A built-in USB 2.0 port can also be used for Bluetooth, Wi-Fi and USB recording.

Highly secure transport and interoperability

The Communicator uses SIP over Transport Layer Security (TLS/SSL) to provide service providers the latest technology for enhanced network security. The range is certified compatible with 3CX and BroadSoft Broadworks, ensuring excellent compatibility with leading soft switch suppliers.

- > Revolutionarily new design
- > Yealink Optima HD voice
- > Dual-port Gigabit Ethernet
- > PoE support
- > 7" 800 x 480-pixel color touch screen with backlight
- > Wi-Fi via WF40
- > Bluetooth via BT40
- > USB recording
- > Up to 16 SIP accounts
- > Paper label free design
- > Headset, EHS support
- > Supports expansion modules
- > Wall mountable
- > Simple, flexible and secure provisioning options

Audio Features

- > HD voice: HD handset, HD speaker
- > Codecs: AMR-WB (optional), AMR-NB (optional), G.722, G.711(A/μ), G.723.1, G.729AB, G.726, iLBC
- > DTMF: In-band, Out-of-band(RFC 2833) and SIP INFO
- > Full-duplex hands-free speakerphone with AEC
- > VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

- > 16 VoIP accounts
- > Call hold, mute, DND
- > One-touch speed dial, hotline
- > Call forward, call waiting, call transfer
- > Group listening, emergency call
- > Redial, call return, auto answer
- > 3-way conferencing
- > Direct IP call without SIP proxy
- > Ring tone selection/import/delete
- > Set date time manually or automatically
- > Dial plan, XML Browser, action URL/URI
- > RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- > USB port (2.0 compliant) for:
 - Bluetooth earphone through BT40,
 - Contact synchronization through BT40,
 - Wi-Fi through WF40,
 - USB call recording through USB flash drive
- > Enhanced DSS Key

Directory

- > Local phonebook up to 1000 entries
- > Black list
- > XML/LDAP remote phonebook
- > Intelligent search method
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded

IP-PBX Features

- > Busy Lamp Field (BLF), Bridged Line Appearance(BLA)
- > Anonymous call, anonymous call rejection
- > Remote office, hot-desking
- > Message Waiting Indicator (MWI)
- > Voice mail, Music on hold
- > Call park, call pickup, Intercom, paging
- > Call completion, call recording
- > Executive and Assistant
- > Centralized call recording
- > Visual voice mail

Display and Indicator

- > 7" 800 x 480-pixel color touch screen with backlight
- > 24 bit depth color
- > LED for call and message waiting indication
- > Wallpaper
- > Intuitive user interface with icons and soft keys
- > Multilingual user interface
- > Caller ID with name, number and photo
- > Screensaver
- > Power saving

Feature keys

- > 29 one-touch DSS keys
- > 7 features keys: message, headset, hold, mute, transfer, redial, hands-free speakerphone
- > 6 navigation keys
- > Volume control keys
- > Illuminated mute key
- > Illuminated headset key
- > Illuminated hands-free speakerphone key

Interface

- > Dual-port Gigabit Ethernet
- > Power over Ethernet (IEEE 802.3af), class 0
- > 1 x USB port (2.0 compliant)
- > 1xRJ9 (4P4C) handset port
- > 1xRJ9 (4P4C) headset port
- > 1XRJ12 (6P6C) EXT port:
 - Supports up to 6 Expansion Modules for an attendant console application

Other Physical Features

- > Color: Classic Grey
- > Wall mountable (optional)
- > External Yealink AC adapter (optional):
 - AC 100~240V input and DC 5V/2A output
- > Power consumption (PSU): 2.0-6.4W
- > Power consumption (PoE): 2.4-7.3W
- > Dimension(W*D*H*T):
 - 266mm*226mm*185mm*54mm
- > Operating humidity: 10~95%
- > Operating temperature: -10~50°C (+14~122°F)

Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy

- > Auto-provision with PnP
- > Zero-sp-touch, TR-069
- > Phone lock for personal privacy protection
- > Reset to factory, reboot
- > Package tracing export, system log


Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT traversal: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > UDP/TCP/DNS-SRV(RFC 3263)
- > QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- > SRTP for voice
- > Transport Layer Security (TLS)
- > HTTPS certificate manager
- > AES encryption for configuration file
- > Digest authentication
- > OpenVPN, IEEE802.1X
- > IPv6
- > LLDP/CDP/DHCP VLAN
- > ICE

Package Features

- > Package content:
 - Yealink SIP-T48G IP phone
 - Handset with handset cord
 - Ethernet Cable (2m CAT5E FTP Cable)
 - Stand
 - Quick Start Guide
 - Power Adapter (Optional)
- > Qty/CTN: 5 PCS
- > N.W/CTN: 8.2 kg
- > G.W/CTN: 9 kg
- > Giftbox size: 324mm*263mm*128mm
- > Carton Meas: 660mm*338mm*273mm

Compliance

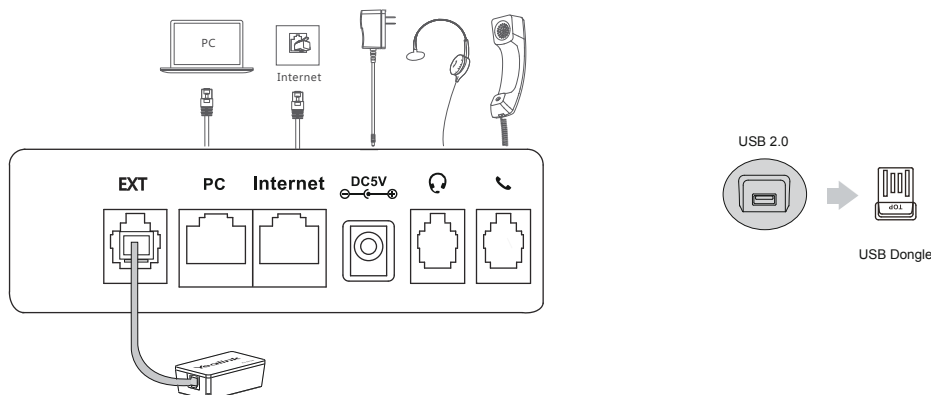

Learn More

To find out how Yealink solutions can help your organization, visit us at www.yealink.com or mail to sales@yealink.com

About Yealink

Yealink is a global leading provider of enterprise communication and collaboration solutions, offering video conferencing service to worldwide enterprises. Focusing on research and development, Yealink also insists on innovation and creation. With the outstanding technical patents of cloud computing, audio, video and image processing technology, Yealink has built up a panoramic collaboration solution of audio and video conferencing by merging its cloud services with a series of endpoints products. As one of the best providers in more than 140 countries and regions including the US, the UK and Australia, Yealink ranks No.1 in the global market share of SIP phone shipments.

Copyright

Copyright © 2018 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.

Copyright © 2018 Yealink(Xiamen) Network Technology CO., LTD. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Web: www.yealink.com
Addr: No.1 Ling-Xia North Road, High Tech Park,
Huli District, Xiamen, Fujian, P.R. China
Copyright©2018Yealink Inc. All right reserved.